



600x 1200mm

FULL BODY





Varmora Granito Pvt. Ltd. came into being with a clear vision - to become a global leader in the world of ceramics in the span of two decades, our futuristic group has grown by leaps and bounds into a nationwide conglomerate manufacturing quality ceramic, porcelain and vitrified tiles. The stability of the company is as good as any 25 years old experienced organization. Spearheaded by visionaries Mr. Bhavesh Varmora, our multi-million business has a vast network of more than 5000 retail outlets and over 700 dealers, we also run around 20 branches offices with more than 1200 professionals across the country.

Varmora has created a modern infrastructure by adopting new-tech and upgrading manufacturing techniques to improve production capacity and quality. Varmora has 10 different state-of-the-art plants across the country with over 100,000 sq. mts. capacity, which allows them to keep their status as the industry leaders. The company has also adopted several environment-friendly manufacturing techniques like water-saving technology. Elaborate and extensive R&D programs have also been set-up to assist in Varmora's endeavor to create more innovative products.



FULL BODY TILES

600x1200mm



The Floor Tile range by Varmora is the epitome of elegance in surface covering options. The Floor Tiles are offered in a variety of awe-inspiring designs that can take your breath away. Each design of this range was developed after in-depth R&D, making them the perfect fit for your floor. Floor Tiles are available in a number of functional sixes such as 600x600mm, 600x1200mm & 800x800mm etc.





Low Water Absorption



Anti Skid



Easy to Clean



Highly Durable



Zero Maintenance



Abrasion Resistance



Eco Friendly




Suitable for Outdoor & Indoor








Glosslab Brown



Finish: GLOSSY
Series: GLOSSLAB DK





GLOSSLAB BROWN

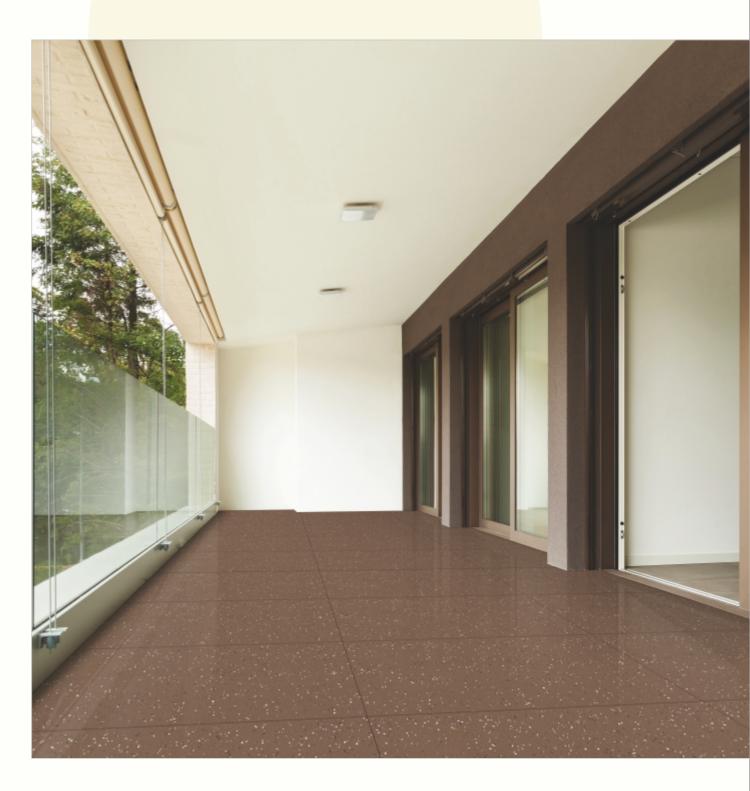



GLOSSLAB IVORY

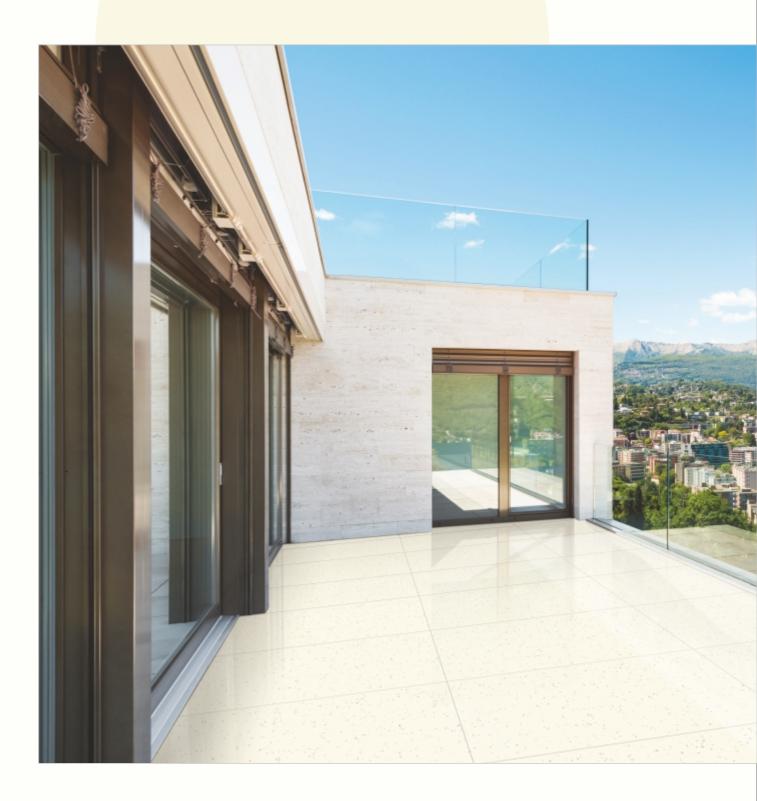









Glosslab Nero




Finish: GLOSSY
Series: GLOSSLAB DK




GLOSSLAB NERO

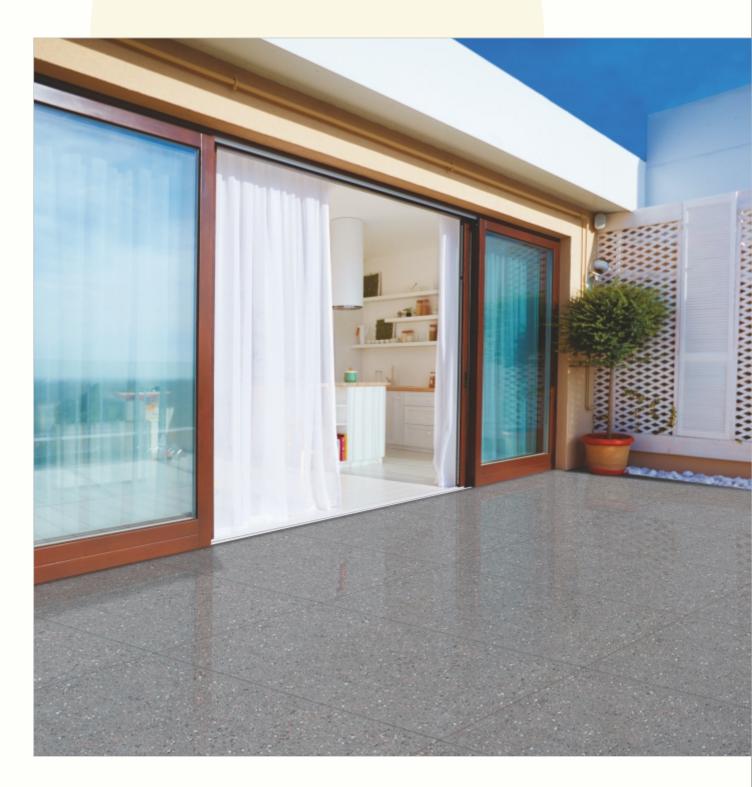

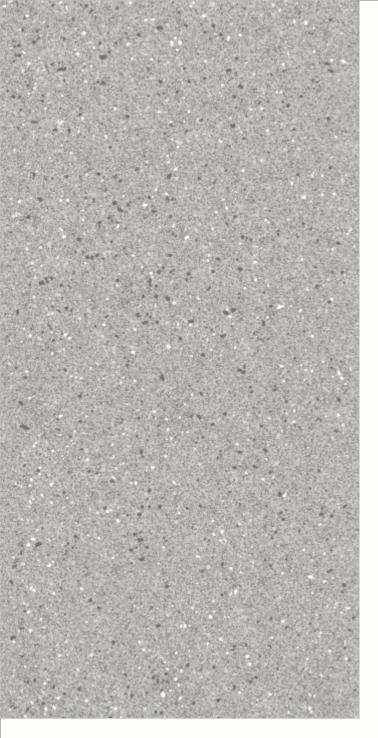


Glosslab Grey



Finish: GLOSSY
Series: GLOSSLAB DK




GLOSSLAB GREY

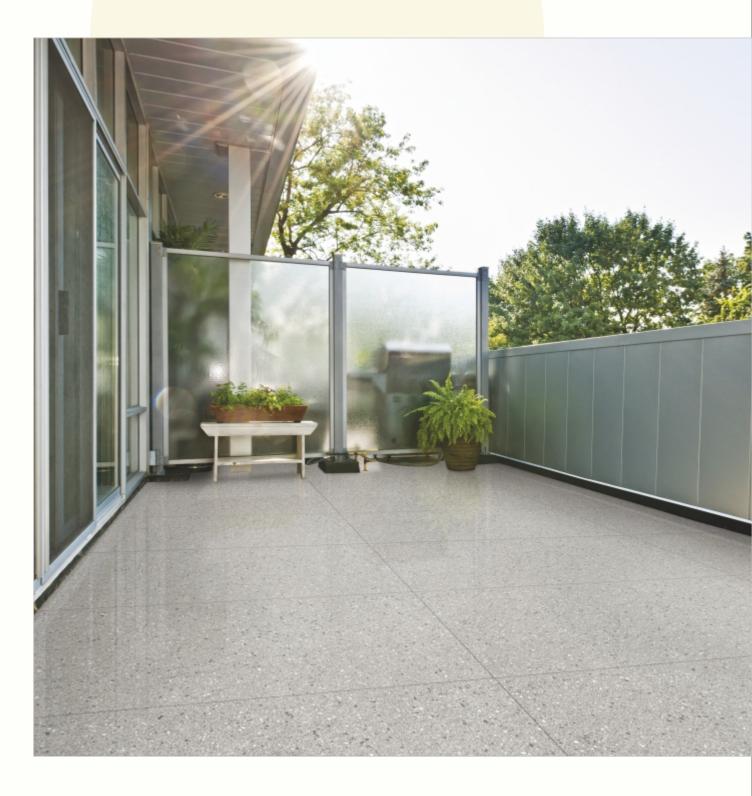



Mattlab Brown



Finish: MATT
Series: MATTLAB DK





MATTLAB BROWN





MATTLABIVORY

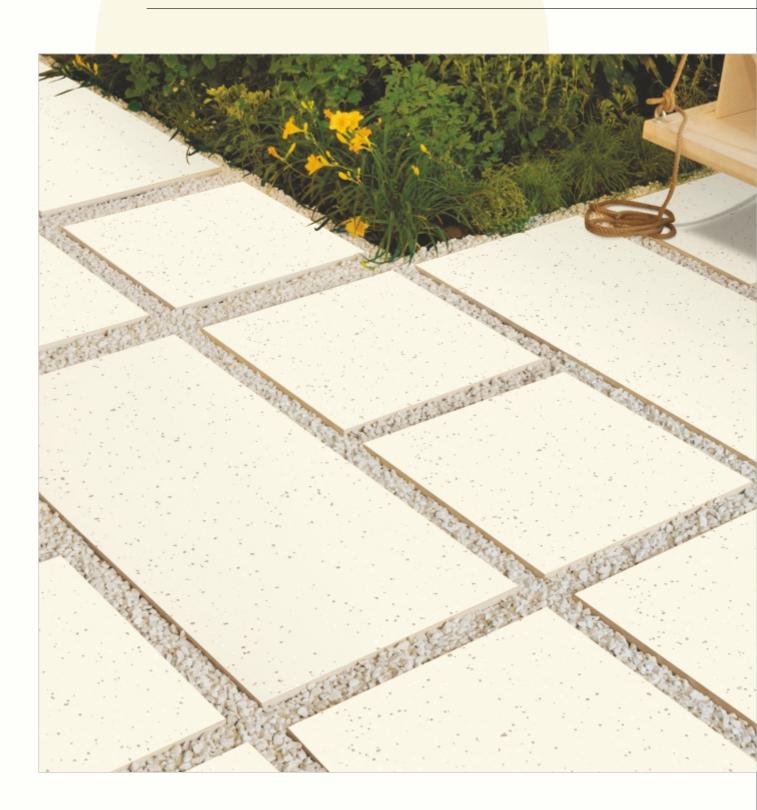








Mattlab Nero




Finish: MATT Series: MATTLAB DK




MATTLAB NERO



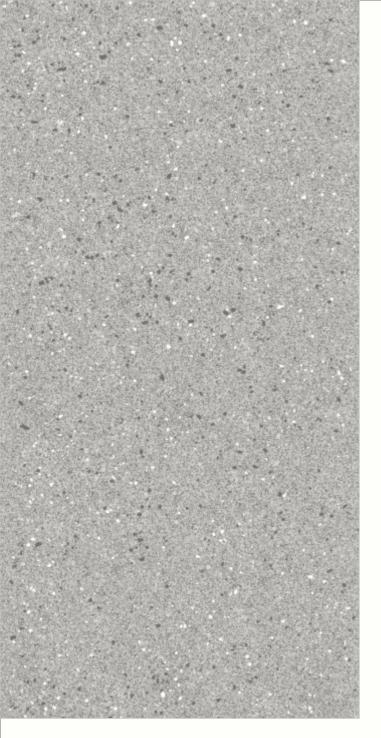

Mattlab Grey



Finish: MATT Series: MATTLAB LT



MATTLAB GREY






GRIPSOM DK GREY




Gripsom Dk Grey






GRIPSOM LT GREY

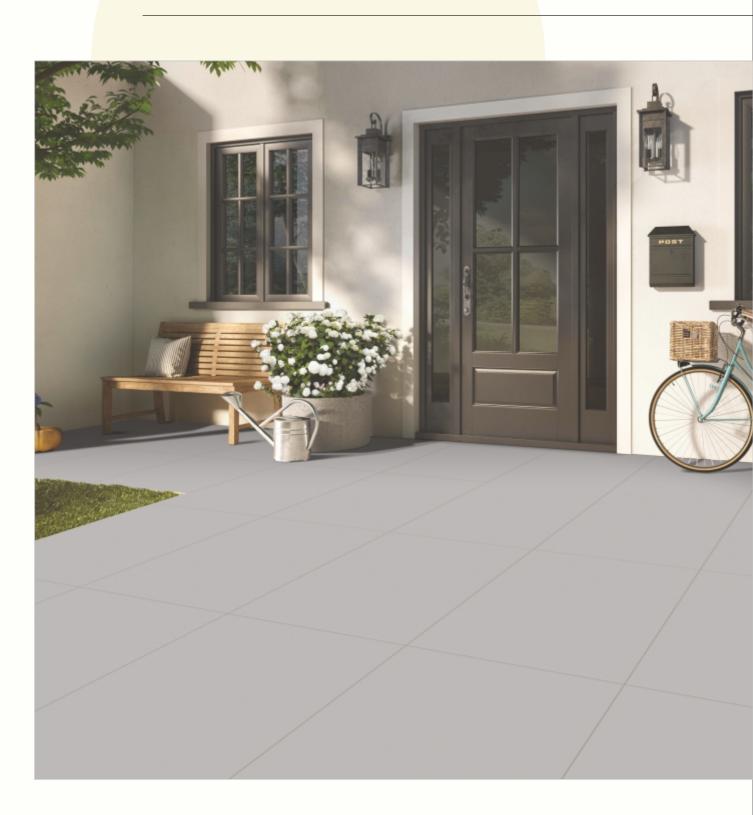

Gripsom Lt Grey






GRIPSOM DOVE




Gripsom Dove






GRIPSOM BEIGE

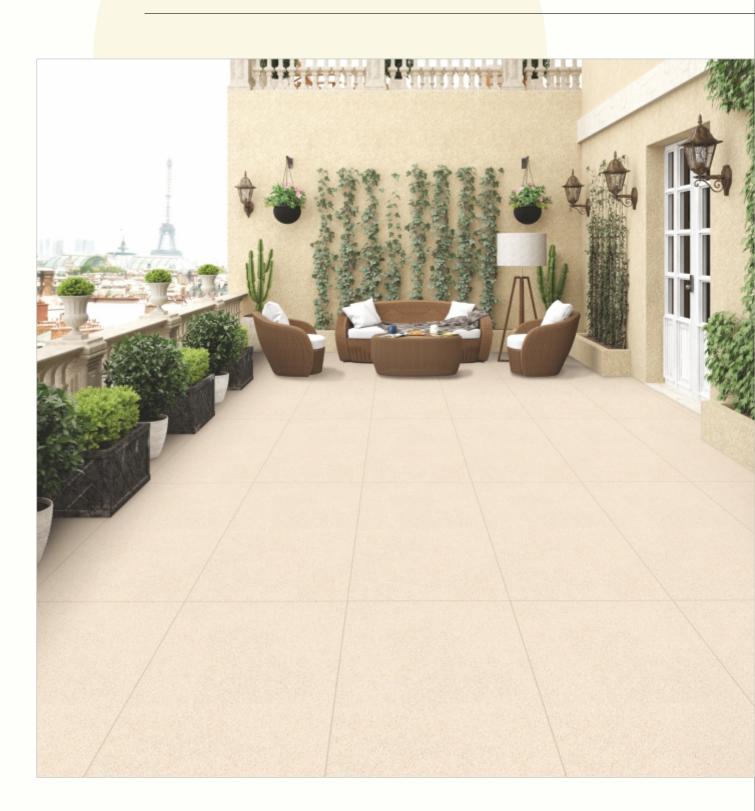








GRIPSOM VERDE




Gripsom Verde

Series: GRIPSOM





Maxstone White




Finish: MATT Series: GRIPSOM




MAXSTONE WHITE



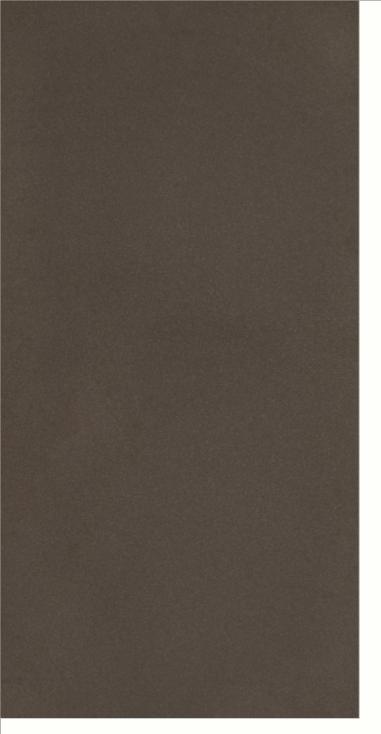

Marmo Brown




Finish: MATT Series: MARMO




MARMO BROWN



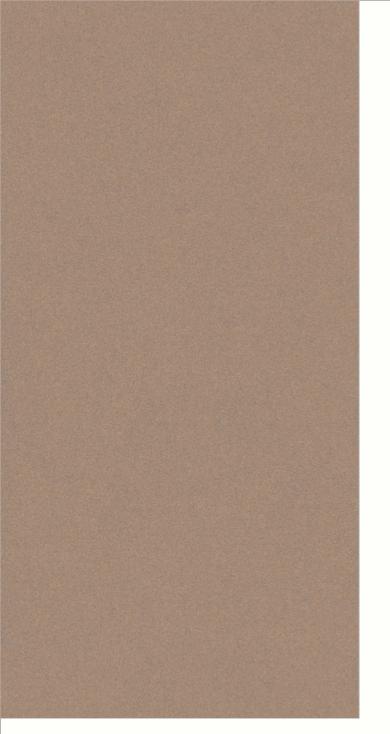


Marmo Coffee




Finish: MATT Series: MARMO




MARMO COFFEE

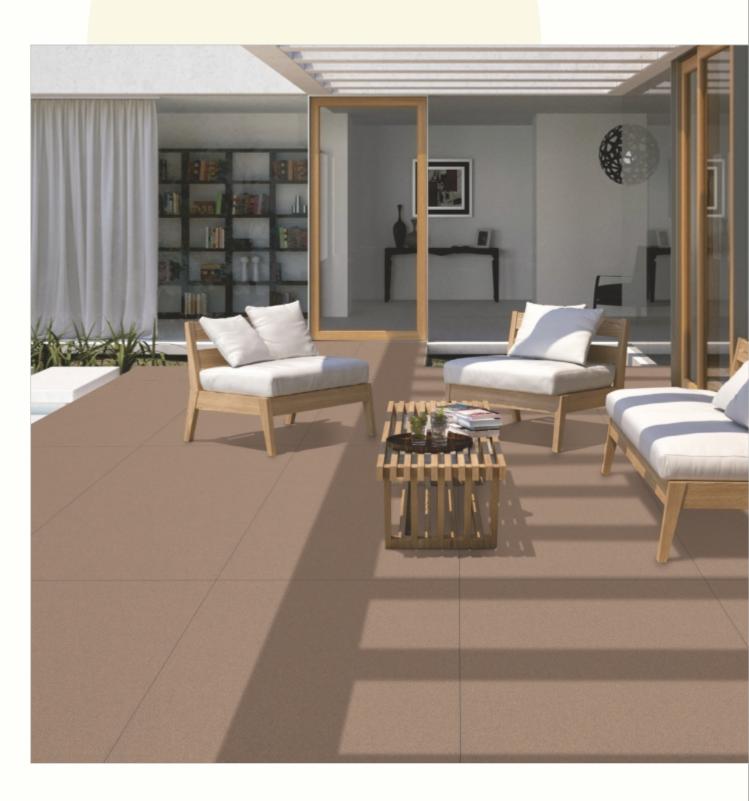

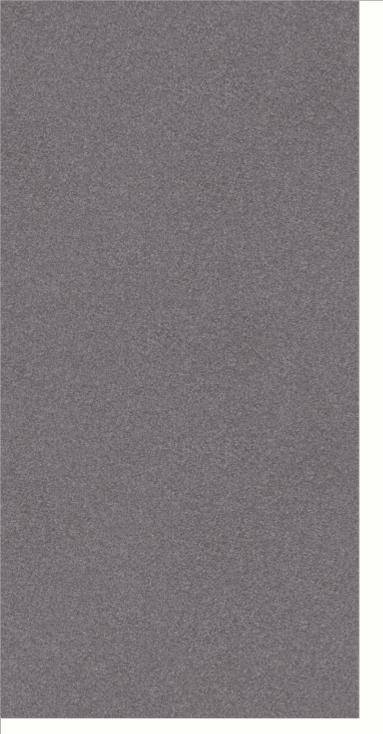

Marmo Nero



Finish: MATT Series: MARMO



MARMO NERO





MARMO SILVER



Marmo Silver




Finish: MATT Series: MARMO



LEPOLA BLACK









Finish: MATT Series: LEPOLA



LEPOLA WHITE

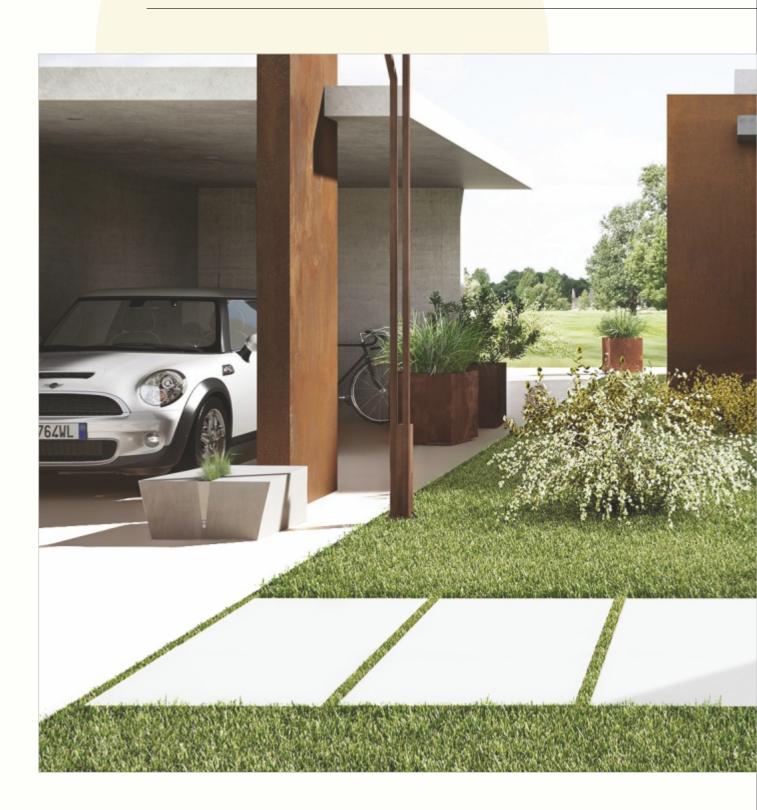

Lepola White



Finish: MATT Series: LEPOLA

SR. NO.	CHARACTERISTIC	TEST METHOD	IS 15622 :2017 (GROUP B I a)	VARMORA VALUE
А	DIMENSION & SURFACE QUA	ALITY		
1	Deviation in Length & Width	IS - 13630 - 1	± 0.10%	± 0.10%
2	Deviation in Thickness	IS - 13630 - 1	± 5.00%	± 3.50%
3	Straightness of sides	IS - 13630 - 1	± 0.10%	± 0.10%
4	Rectangularity	IS - 13630 - 1	± 0.10%	± 0.10%
5	Surface Flatness	IS - 13630 - 1	± 0.50%	± 0.20%
6	Surface Quality	IS - 13630 - 1	Minimum 95 % of tiles shall be free from visible defects	95%
В	PHYSICAL PROPERTIES			
1	Water Absorption	IS - 13630 - 2	≤0.08%,Avg.	0.06%,Avg.
2	Modulus of Rapture(N/mm²)	IS - 13630 - 6	Avg. 35 N/mm ²	Avg. 40 N/mm ²
3	Breaking Strength (N)	IS - 13630 - 6	Thickness \geq 7.5 mm = 1300 N, Min	Thickness \geq 7.5 mm = 1700 N
4	Moisture Expansion (mm/m)	IS - 13630 - 3	0.02 Max.	0.01 Max.
5	Scratch Hardness of Surface (Moh' Scale)	IS - 13630 - 13	5, Min	5, Min*
6	Resistance of Surface Abrasion (Glazed tiles)	IS - 13630 - 11	Class II, Min.	Class IV
7	Co-efficient of linear thermal expansion	IS - 13630 - 4	6x10 ⁻⁶ , Max	6x10 ⁻⁶ , Max
8	Thermal Shock Resistance	IS - 13630 - 5	10 Cycles, Min	10 Cycles, Pass
9	Crazing Resistance	IS - 13630 - 9	4 Cycles at 7.5 Bar, Min	4 Cycles, Pass
10	Impact Resistance- Coefficient of Restitution	IS - 13630 - 14	0.55, Min	0.55, Min
11	Coefficient of Friction	-	Manufacturer Norms	Manufacturer Norms
12	Frost Resistance	IS - 13630 - 10	Manufacturer Norms	No Damage
13	Resistance to Deep Abrasion for Unglazed Tiles (mm³)	IS - 13630 - 12	140,Max	140,Max
14	Bulk Density (g/cc)	IS - 13630 - 2	2.2, Min	2.3, Min
С	CHEMICAL PROPERTIES			
1	Resistance to Staining	IS - 13630 - 8	Glaze - Class 1,Min Unglaze - Class 2,Min	Glaze & Unglaze - Class 2,Min
2	Resistance to Household Chemicals	IS - 13630 - 8	Glaze - Class AA,Min Unglaze -Required If agreed according to chemical resistance class indicated by manufacturer	Class AA
3	Resistance to Acids & Alkalis	IS - 13630 - 8	Glaze & Unglaze -Required If agreed according to chemical resistance class indicated by manufacturer	Resistance

VARMORA Values given above are own valued, Which we tries to maintain, how ever test results may differ up to the limit prescribed under IS 15622 :2017 (GROUP B I a)

* Minimum 5 On matt tiles.

Note: Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Our effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons (box) of the tiles. No responsibility will be accepted by the company once the tiles have been fixed.







VARMORA GRANITO PVT. LTD.

HEAD OFFICE: 8/A National Highway, At.-Dhuva, Tal.-Wankaner, Dist. Morbi.

Mob.: +91 98252 23068 E-mail: marketing@varmora.com

CORPORATE OFFICE: A-54, 1st Floor, Elite Auto House, Mathuradas Vasanji Road,

Andheri - Kurla Road, Andheri (EAST).

Tel.:+91-22-28389790 / 91 / 92, Fax: +91-22-28389794

E-mail: mumbai@varmora.com

Customer Care: 1800 212 0053 Join us: **(f) (a) (n) (D)**

www.varmora.com